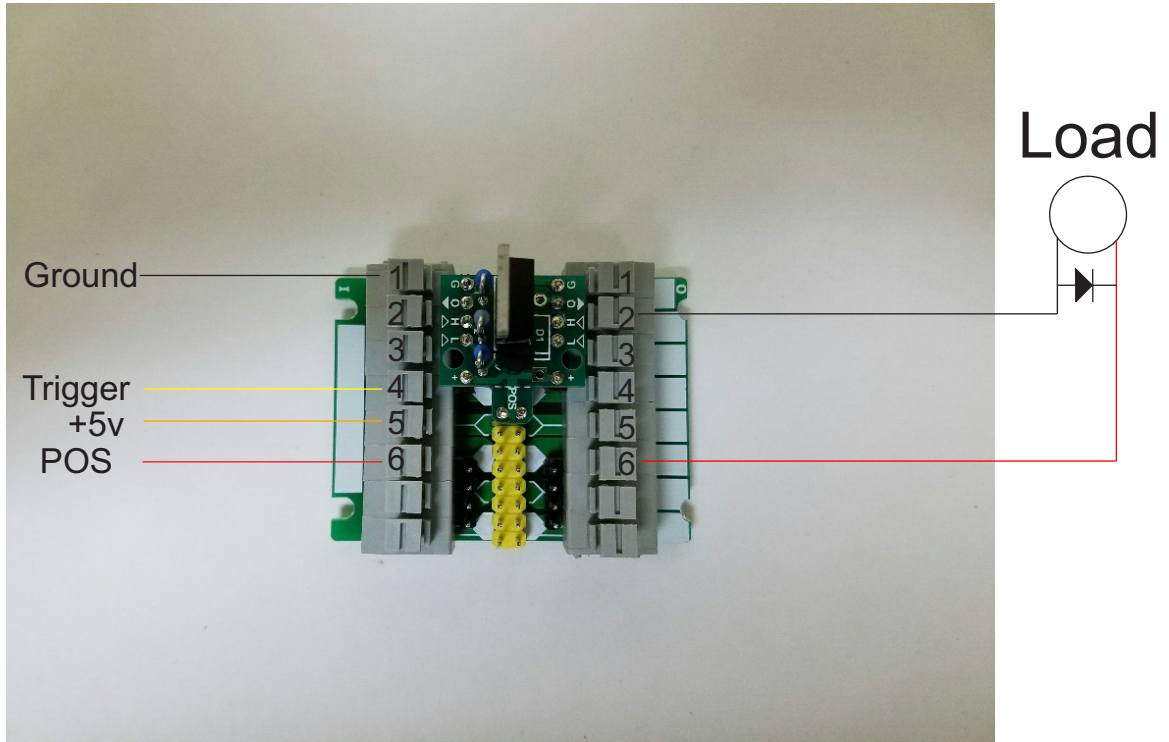# Yellow Jacket eSwitch

Recommended connection using the eSwitch with the YJ-PAD

Low Level Trigger

POS can be any positive value

Load

Ground — 1
2
3
Trigger — 4
+5v — 5
POS — 6

High Level Trigger

POS can be any positive value

Load

Note: Diode can be placed on board

Ground — 1
2
Trigger — 3
4
POS — 5

Note: will damage transistor if on board Alternatively, POS can run directly to load with Diode across the load.